




RJ-325 & RJ-325HD Commercial Compactors

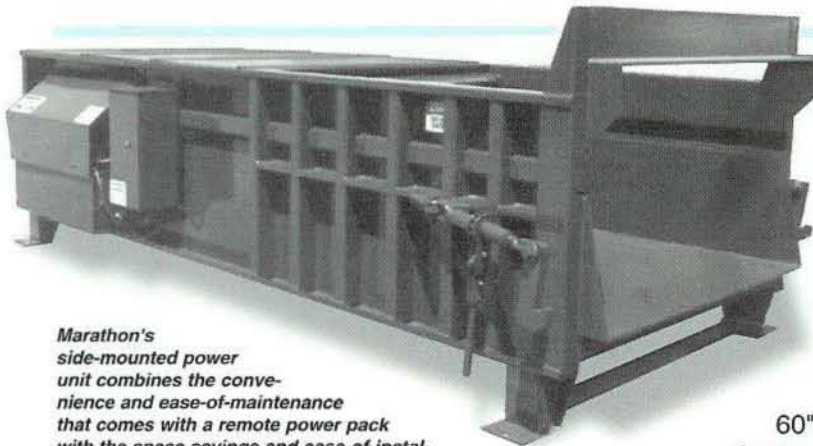

Marathon's side-mounted power unit combines the convenience and ease-of-maintenance that comes with a remote power pack with the space savings and ease-of-installation of an integrated power pack.

RJ-325 Heavy Commercial Compactor




Marathon's RamJet **RJ-325** is a real work horse! Its proven capability assures top performance in heavy commercial and industrial applications. The **RJ-325** is unique to other compactors in its class, providing a large 60"W x 67 1/2"L **clear top opening** and a 33" deep **charge box** – a feature greatly appreciated at peak loading times or when compacting bulky items!

Engineering...

The **RJ-325** is stress engineered for durability. That means the strength is where it belongs – like the 1/2" charge box floor reinforced with seven heavy duty steel channels, 1/2" steel plate ram face backed with 10" structural channels and extra rugged reinforced sides.

RJ-325HD Heavy Duty Compactor

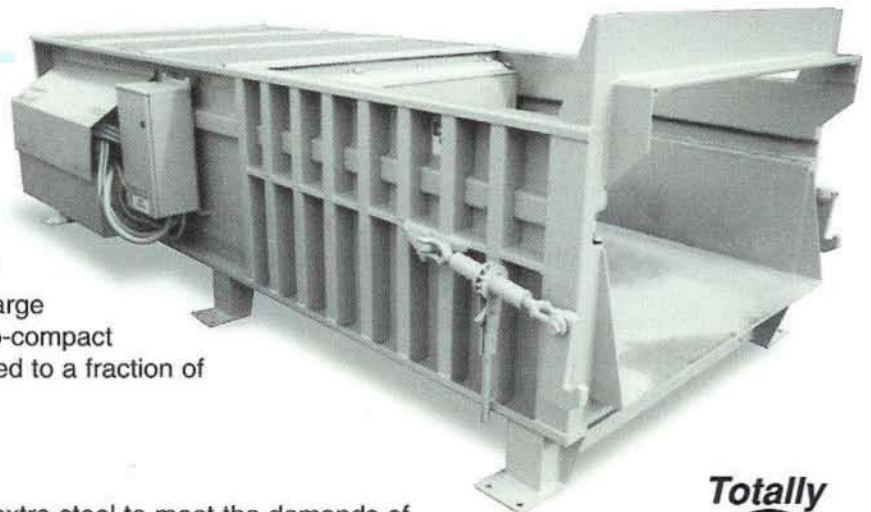

The large 59 1/2"W x 67 1/2"L clear top opening and superior strength of the **RJ-325HD** make it just right for large volumes of crates, skids, and other hard-to-compact industrial refuse and trash. Waste is crushed to a fraction of their original bulk!

Engineering...

Marathon's **RJ-325HD** is engineered with extra steel to meet the demands of heavy-duty industrial use. Cylinder supports, 1" thick breaker bar, 3/8" ram top and extra side supports are added for superior endurance. Also standard on the RJ-325HD are 1/4" thick steel charge box liners and 1/2" thick abrasion resistant steel plate on the charge box floor.



RJ-325

RJ-325HD

Specifications:

Charge Box Capacity		
[Mfrs. Rating].....	3.15 cy (2.41m ³)	3.15 cy (2.41m ³)
[WASTEC Rating].....	2.55 cy (1.95m ³)	2.53 cy (1.93m ³)
Clear Top Opening.....	67 1/2" x 60"	67 1/2" x 59 1/2"
	(1715mm x 1524mm)	(1715mm x 1511mm)
Capacity Per Hour.....	184 cy (141m ³)	183 cy (140m ³)

Performance Characteristics:

Cycle Time.....	50 sec.	50 sec.
Total Normal Force.....	46,700 lb (208 kN)	46,700 lb (208 kN)
Total Maximum Force.....	55,100 lb (245 kN)	55,100 lb (245 kN)
Normal Ram		
Face Pressure.....	26.8 psi (185 kPa)	27.1 psi (187 kPa)
Maximum Ram		
Face Pressure.....	31.7 psi (219 kPa)	31.9 psi (220 kPa)
Ram Penetration.....	13" (330 mm)	13" (330 mm)

Electrical Equipment:

TEFC Electrical Motor		
3/60-208/230/460.....	15 hp (11 kW)	15 hp (11 kW)
Electrical Control Voltage.....	120 VAC	120 VAC

UL Labeled Panel Box: NEMA Type, All Circuits Fused
Standard Controls: Keylock Start & Stop, Connected to 13" Sealite

Hydraulic Equipment:

Hydraulic Pump		
Capacity.....	18.5 gpm (70 L/min.)	18.5 gpm (70 L/min.)
Normal Pressure.....	1650 psi (11 mPa)	1650 psi (11 mPa)
Maximum Pressure.....	1950 psi (14 mPa)	1950 psi (14 mPa)
Hydraulic Cylinder Bore.....	6" (152mm)	6" (152mm)
Hydraulic Cylinder Rod.....	4" (102mm)	4" (102mm)
Reservoir Capacity.....	20 gal. (76 L)	30 gal. (114 L)


Structural Characteristics:

Packer Body: Side Plates.....	3/16" (4.76mm)	3/16" (4.76mm)
Charge Box Liners.....	N/A	1/4" (6.35mm)
Charge Box Floor.....	1/2" (12.7mm)	1/2" (12.7mm) Abrasion Resistant Plate (AR235)
Ram Face Plate.....	1/2" (12.7mm)	1/2" (12.7mm)
Ram Bottom.....	3/8" (9.53mm)	3/4" (19.05mm)
Ram Sides.....	1/4" (6.35mm)	1/4" (6.35mm)
Ram Top.....	1/4" (6.35mm)	3/8" (9.53mm)

Weight.....5700 lbs. (2586 kg).....6700 lbs. (3039 kg)

RAMJET

RJ-325/325HD



Ram Guide System

▼ The packing ram is supported by specially formulated cast iron shoes which ride on replaceable wear strips. This



exclusive design protects the charge box floor from the full force of the packing ram, extending its life and dramatically reducing compaction-robbing friction.

Industrial Grade Systems

▼ The RJ-325 & 325HD have industrial grade electrical and hydraulic components—all **totally UL Listed!** The controls are contained in an NEMA 4 enclosure and connected to the power unit with 13 ft. of Sealite. The pump is rigidly secured to a "C" flange motor with a machined bracket for assured coupling alignment.



Top View of Typical Compactor & Container Configuration

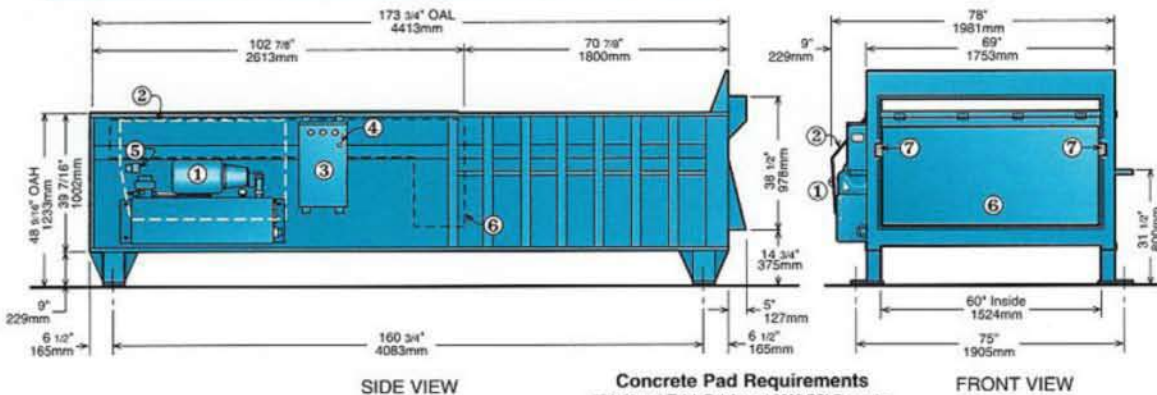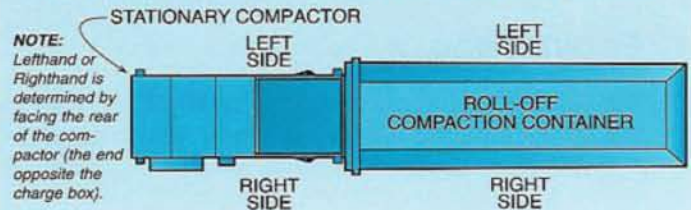

Concrete Pad Requirements
6" (153mm) Thick Reinforced 3000 PSI Concrete,
(4) 3/4" (20mm) Anchor Bolts (Min.)

- ① Side-Mount Power Unit
- ② Power Unit Weather Cover
- ③ Control Panel Box
- ④ Motor Starter Reset Button
- ⑤ Limit Switch
- ⑥ Ram
- ⑦ Ram Guide Shoes with Replaceable Wear Strips



1-800-464-3095



Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI Regulation Z245.2, all OSHA standards, and certified under WASTEC's Stationary Compactor Certification Program. Products must be used with safe practice and in accordance with said regulations and standards.

ENVIRONMENTAL INDUSTRY ASSOCIATION